

Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency (typical value)	Output Voltage	No load Voltage
LC60W200-350NS	200mA	0.29A	65W	8-44.0W	0.95	94.0%	40-220V	250V
	250mA			10-55.0W		94.0%	40-220V	
	300mA			12-60.0W		94.0%	40-200V	
	350mA			14-59.5W		93.5%	40-170V	

*** Test result @230V, 50Hz, Full Load.**

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Output Features	Non-isolation
	IP Grade	IP20
	Insulation Class	Class I
Input	Rated Input Voltage	220-240V
	Range of Input Voltage	198-264VAC or 198-280VDC
	Frequency	0/50-60Hz
	Power Factor	≥0.95 (230VAC, full Load)
	THD	≤15%(230VAC, full Load)
	No-load Power Consumption	≤0.5W @230VAC
Output	Current Accuracy	±5%
	Max. Output Voltage	250V
	Started Delay Time	≤0.5S (230VAC, full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin) / (Imax+Imin)
	PstLM	≤1
	SVM	≤0.4
	Emergency output coefficient	1
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	/

	Over-temperature protection	Auto Recovery
	Insulation voltage	O/P to PE , 1.75KVac/1min I/P to PE , 1.75KVac/1min
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P <0.7mA
Environment	Ta/Operation Temperature	-20...+65℃
	Ts/Storage Temperature	-30....+85℃
	Tc/Enclosure Temperature	90℃
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Built-in
	PRI Wire preparation	0.75-1.5 [□]
	SEC Wire preparation	0.5-1.5 [□]
	Dimension	165*30*21mm (L*W*H)
Standards	Certification	CCC、CE、ENEC、EAC、UKCA、SAA
	Safety Standards	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN IEC 62384:2020 EN 62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1 BS EN 61347-1:2015/A1:2021 BS EN 61347-2-13:2014/A1:2017 BS EN 62493:2015 BS EN IEC 62384:2020
	EMC Standards	EN IEC 55015:2019 EN IEC 55015:2019/A11:2020 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021 EN 61547:2009
	Performance	EN62384:2020
	Surge	L-N:1KV; L/N-PE:2KV;
	Others	
Others	RoHS	Complied to 2011/65/EU
	Life Time	50000h @Tc=90℃
	Warranty	5years
	Noise	≤ 24dB @Background noise ≤18dB ,Interval≥15cm
Remark: 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25℃ ambient temperature. 2.LED Driver is a component of the luminaires. Luminaires and wire layout will affect the EMC, please check the EMC with end products again.		

2. Output Current Setting

Output Current	Dial 1	Dial 2
350mA	ON	ON
300mA	OFF	ON
250mA	ON	OFF
200mA	OFF	OFF

3. Connected quantities of different current Breaker

TYPE	Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B		10	13	16	20	25	@230VAC	60	150μs
TYPE C		16	21	26	32	40			
TYPE D		26	33	41	51	64			

4. Label

KGP
KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

☐ N
☐ L
☐

LED Driver
LC60W200-350NS
Constant Current Type For LED modules only Made in China

PIN1	PIN2	I _{rated} [mA]	P _{rated} [W]	U _{rated} [V]	U _N / f _N	I _N [A]	t _a [°C]	λ
OFF	OFF	200	44.0	40-220	220-240V 0/50-60Hz	0.29	-20...+65	0.95
ON	OFF	250	55.0	40-220				
OFF	ON	300	60.0	40-200				
ON	ON	350	59.5	40-170				


U_{out} : Max.250VDC

wire preparation
8mm wire 0.5-1.5


Output

tc=90°C


5. Electrical values

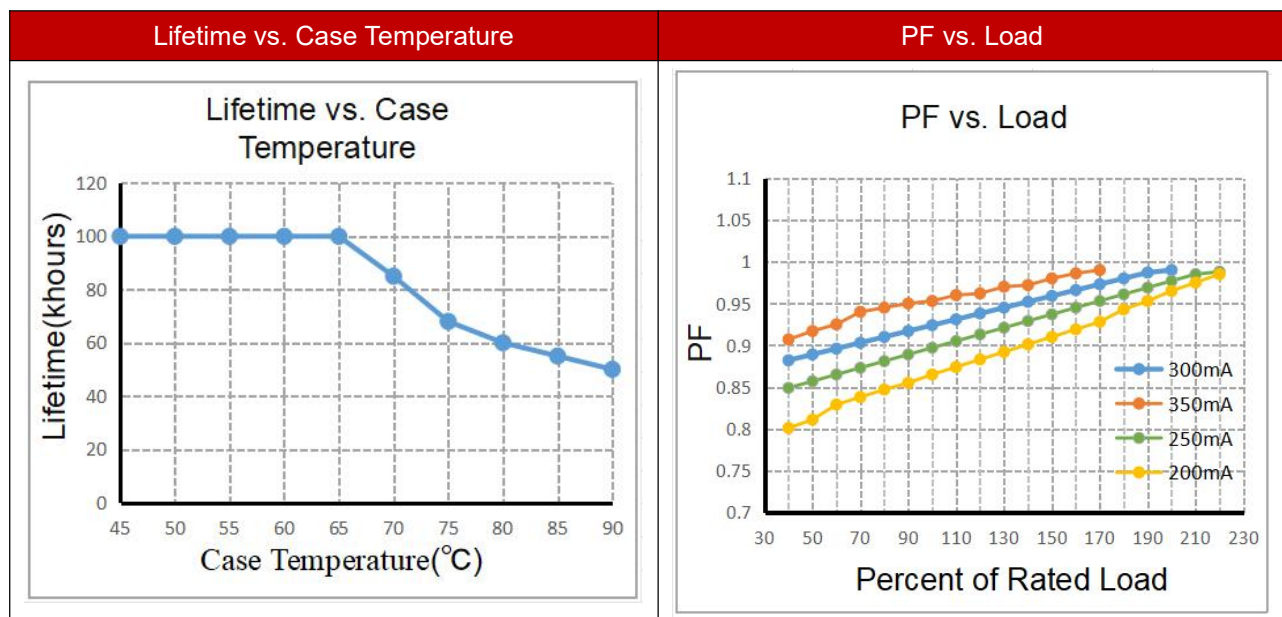


THD vs. Load

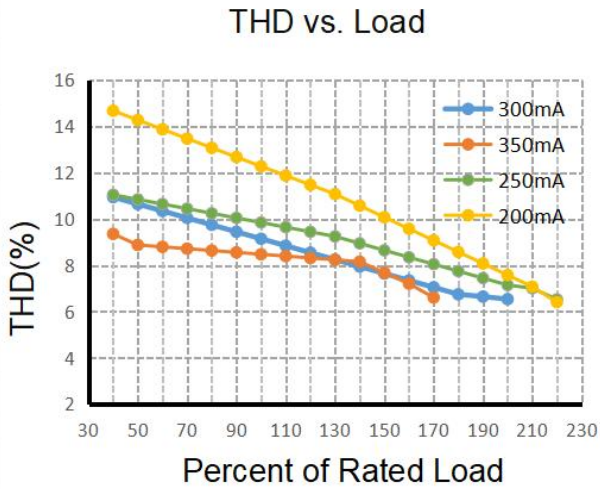

Efficiency vs. Load

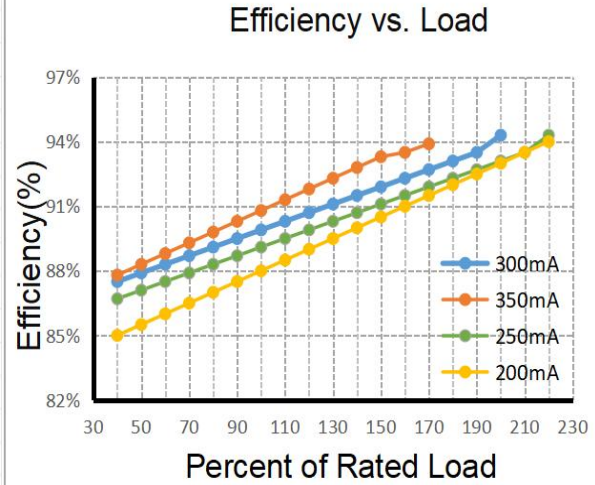


6. Dimension (Unit: mm)

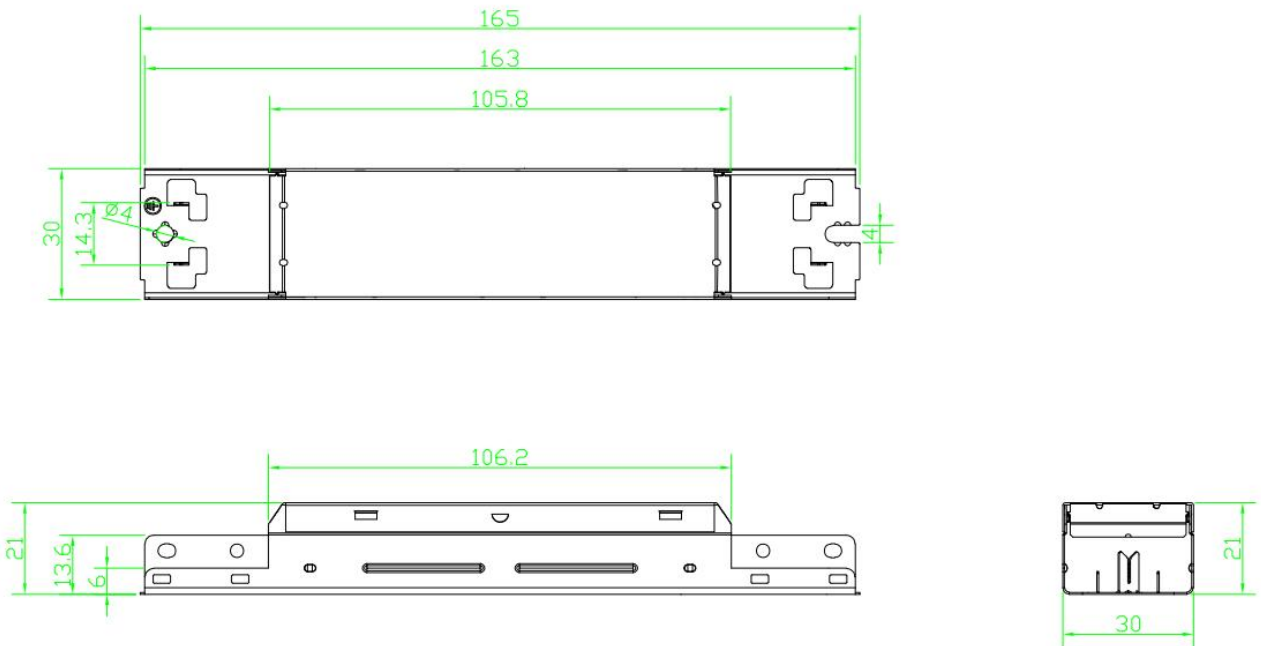

7. Packing information

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
L375*W245*H220	110	1.019	11.21	11.65

8. Wiring Diagram

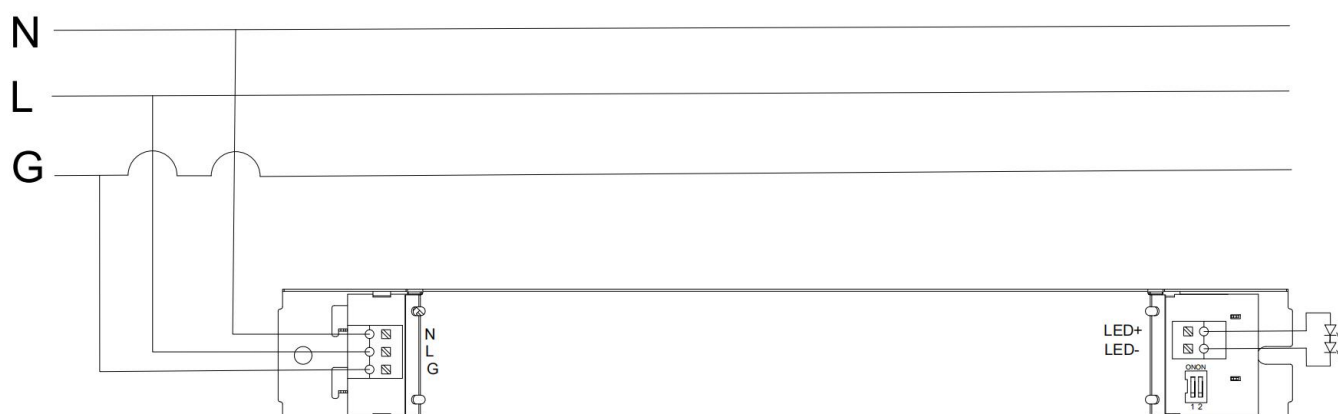

9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- The lamp controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.

10. REVISION HISTORY

DATE	REV.	REMARK
2024-11-1	V1.0	Initial release.